



Overview

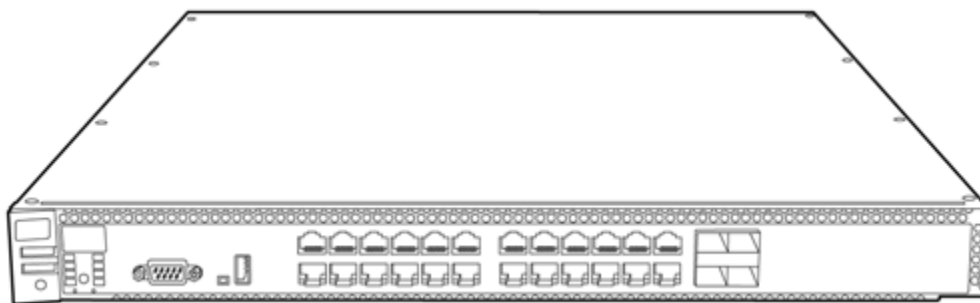

HP ProCurve 6600-24XG Switch

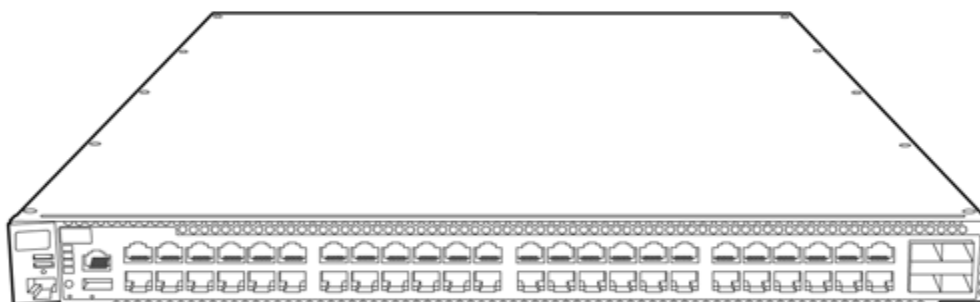

HP ProCurve 6600-48G Switch

Models

HP ProCurve 6600-24G Switch	J9263A
HP ProCurve 6600-24G-4XG Switch	J9264A
HP ProCurve 6600-24XG Switch	J9265A
HP ProCurve 6600-48G Switch	J9451A
HP ProCurve 6600-48G-4XG Switch	J9452A

Key features

- Data center server access layer
- Front-to-back cooling, redundant power
- Layer 2 - Layer 4 and intelligent edge feature set
- Enterprise-class performance and security
- Scalable 10/100/1000 and 10-GbE connectivity

Introduction

The HP ProCurve 6600 Switch Series consists of the most advanced data center server edge switches in the HP ProCurve Networking product line. The 6600 series includes 10/100/1000Base-T and 10-GbE SFP+ 1U rack-mount switches optimized for server edge connectivity with front-to-back (reversible) airflow, redundant hot-swappable power, and redundant hot-swappable fans. The foundation for all of these switches is a purpose-built, programmable ProVision ASIC that allows the most demanding networking features, such as Quality of Service (QoS) and security, to be implemented in a scalable yet granular fashion. With a variety of connectivity interfaces and expanded buffering, the 6600 switches offer excellent investment protection, flexibility, and scalability, as well as ease of deployment and reduced operational expense.

Overview

Accessories

NEW HP ProCurve 6600 Switch Power Supply	J9269A
NEW HP ProCurve 6600 Switch Premium License	J9305A
HP ProCurve Gigabit-SX-LC Mini-GBIC	J4858C
HP ProCurve Gigabit-LX-LC Mini-GBIC	J4859C
HP ProCurve Gigabit-LH-LC Mini-GBIC	J4860C
NEW HP ProCurve 1000-BX-D SFP-LC Mini-GBIC	J9142B
NEW HP ProCurve 1000-BX-U SFP-LC Mini-GBIC	J9143B
HP ProCurve 100-FX SFP-LC Transceiver	J9054B
NEW HP ProCurve 100-BX-D SFP-LC Transceiver	J9099B
NEW HP ProCurve 100-BX-U SFP-LC Transceiver	J9100B
NEW HP ProCurve 10-GbE SFP+ SR Transceiver	J9150A
NEW HP ProCurve 10-GbE SFP+ LRM Transceiver	J9152A
NEW HP ProCurve 10-GbE SFP+ LR Transceiver	J9151A
NEW HP ProCurve 10-GbE SFP+ 1m Direct Attach Cable	J9281A
NEW HP ProCurve 10-GbE SFP+ 3m Direct Attach Cable	J9283A
NEW HP ProCurve 10-GbE SFP+ 7m Direct Attach Cable	J9285A
HP ProCurve Manager 3.0	--
NEW HP ProCurve 6600 Switch Fan Tray	J9271A
NEW HP ProCurve 6600 Series Rack Mount Kit	J9469A
NEW HP ProCurve 6600 Series Air Plenum Kit	J9480A
NEW HP ProCurve 6600-24G/24G-4XG Air Plenum	J9481A

Features and benefits

Industry-leading warranty*

Data center optimized

- **Front-to-back airflow:** designed to be co-located at the top of a server rack, the 6600 series supports front-to-back, reversible back-to-front airflow to support hot aisle/cold aisle configurations; the N+N fan tray is also hot-swappable, allowing easy replacement in the rack
- **Modular internal power supplies:** supports redundant, hot-swappable power supply configurations (units ship with one supply)
- **Server-to-switch distributed trunking:** supports Layer 2 LACP groups from a single server across two different switches for active-active server NIC teaming configurations
- **Deployment/serviceability:** data connectivity and management ports are all front-side accessible, and power supplies and fan trays are rear-side accessible to allow for easy maintenance; tool-less access to all system components provides easy in-rack serviceability
- **Power down idle ports:** power down blocks of idle Gigabit and 10GbE ports to save power; idle ports can be reinitialized without rebooting; available on 6600-24XG / 48G / 48G-4XG models
- **Out-of-band management:** remotely monitor and manage switch via Ethernet out-of-band management port; eliminate need for terminal server network; available on 6600-24XG / 48G / 48G-4XG models

Management

- **Remote Intelligent Mirroring:** mirrors ingress/egress ACL-selected traffic from a switch port or VLAN to a local or remote 8200zl/6600/6200yl/5400zl/3500yl switch port anywhere on the network
- **RMON, XRMON, and sFlow v5:** provide advanced monitoring and reporting capabilities for statistics, history, alarms, and events
- **Uni-Directional Link Detection (UDLD):** monitors cable between two switches and shuts down the ports on both ends if the cable is broken turning the bi-directional link into uni-directional; this prevents network problems such as loops
- **IEEE 802.1AB Link Layer Discovery Protocol (LLDP):** automated device discovery protocol for easy mapping by



Overview

network management applications

- **Management simplicity:** common networking features and CLI implementation (common across HP ProCurve 8200zl/6600/6200yl/5400zl/3500yl switches)
- **Command authorization:** leverages RADIUS to link a custom list of CLI commands to individual network administrator's login; also provides an audit trail
- **Friendly port names:** allow assignment of descriptive names to ports
- **Multiple configuration files:** multiple configuration files can be stored to the flash image
- **Dual flash images:** provides independent primary and secondary OS files for backup while upgrading

Connectivity

- **IPv6:**
 - **IPv6 host:** the switches can be managed and deployed at the edge of IPv6 networks
 - **Dual stack (IPv4/IPv6):** provides transition mechanism from IPv4 to IPv6; supports connectivity for both protocols
 - **MLD snooping:** forwards IPv6 multicast traffic to the appropriate interface; prevents IPv6 multicast traffic from flooding the network
 - **IPv6 ACL/QoS:** supports ACL and QoS for IPv6 network traffic
 - **IPv6 ready:** the switch hardware can support IPv6 QoS, ACL, routing, tunneling, and security; these features will be available when enabled via software update in follow-on releases
- **Auto-MDIX:** automatically adjusts for straight-through or crossover cables on all 10/100/1000 ports
- **Jumbo frames:** on Gigabit and 10-Gigabit ports, allow high-performance remote backup and disaster-recovery services

Performance

- **High-speed/capacity architecture:** based on the purpose-built ProVision ASICs to provide superior system performance and scalability
- **Selectable queue configurations:** increase performance by selecting the number of queues and associated memory buffering that best meet the requirements of your network applications

Resiliency and high availability

- **IEEE 802.3ad Link Aggregation Control Protocol (LACP) and ProCurve trunking:** support up to 60 trunks, each with up to 8 links (ports) per trunk; trunking across modules is supported IEEE 802.1s Multiple Spanning Tree: provides high link availability in multiple VLAN environments by allowing multiple spanning trees; provides legacy support for IEEE 802.1d and IEEE 802.1w
- **Virtual Router Redundancy Protocol:** VRRP allows groups of two routers to dynamically back each other up to create highly available routed environments
- **Server-to-switch distributed trunking:** allows a server to connect to two switches with one logical trunk that consists of multiple physical connections; enables load-balancing and increases resiliency
- **Sparing simplicity:** common power supplies, fan trays, and transceivers are used among the 6600 series products

Layer 2 switching

- **ProCurve switch meshing:** dynamically load-balances across multiple active redundant links to increase available aggregate bandwidth
- **GARP VLAN Registration Protocol:** allows automatic learning and dynamic assignment of VLANs
- **IEEE 802.1ad Q-in-Q (requires Premium License):** increases the scalability of Ethernet network by providing a hierarchical structure; connects multiple LANs on high-speed campus or metro network
- **IEEE 802.1v protocol VLANs:** isolate select non-IPv4 protocols automatically into their own VLANs

Layer 3 services

- **Loopback interface address:** defines an address in RIP and OSPF that can always be reachable, improving diagnostic capability
- **UDP helper function:** UDP broadcasts can be directed across router interfaces to specific IP unicast or subnet broadcast addresses and prevent server spoofing for UDP services such as DHCP

Overview

Layer 3 routing

- **RIP**: provides RIPv1 and RIPv2 routing
- **Static IP routing**: provides manually configured routing; includes ECMP capability
- **OSPF** (requires Premium License): includes host-based ECMP to provide link redundancy/scalable bandwidth and NSSA

Security

- **Source-port filtering**: allows only specified ports to communicate with each other
- **RADIUS/TACACS+**: eases switch management security administration by using a password authentication server
- **Secure Shell** (SSHv2): encrypts all transmitted data for secure, remote command-line interface (CLI) access over IP networks
- **Port security**: allows access only to specified MAC addresses, which can be learned or specified by the administrator
- **MAC address lockout**: prevents configured particular MAC addresses from connecting to the network
- **Detection of malicious attacks**: monitors ten types of network traffic and sends a warning when an anomaly that potentially can be caused by malicious attacks is detected
- **Secure FTP**: allows secure file transfer to/from the switch; protects against unwanted file downloads or unauthorized copying of switch configuration file
- **Switch management logon security**: can require either RADIUS or TACACS+ authentication for secure switch CLI logon
- **Secure management access**: all access methods—CLI, GUI, or MIB—are securely encrypted through SSHv2, SSL, and/or SNMPv3
- **ICMP throttling**: defeats ICMP denial-of-service attacks by enabling any switch port to automatically throttle ICMP traffic
- **Virus throttling**: detects traffic patterns typical of WORM-type viruses and either throttles or entirely prevents the ability of the virus to spread across the routed VLANs or bridged interfaces, without requiring external appliances
- **STP BPDU port protection**: blocks Bridge Protocol Data Units (BPDUs) on ports that do not require BPDUs, preventing forged BPDU attacks
- **Dynamic IP lockdown**: works with DHCP protection to block traffic from unauthorized hosts, preventing IP source address spoofing
- **DHCP protection**: blocks DHCP packets from unauthorized DHCP servers, preventing denial-of-service attacks
- **Dynamic ARP protection**: blocks ARP broadcasts from unauthorized hosts, preventing eavesdropping or theft of network data
- **USB Secure Autorun** (requires HP ProCurve Manager Plus): deploys, diagnoses, and updates switch using USB flash drive; works with secure credential to prevent tampering
- **STP Root Guard**: protects root bridge from malicious attack or configuration mistakes
- **Management Interface Wizard**: CLI-based step-by-step configuration tool to help ensure that management interfaces such as SNMP, telnet, SSH, SSL, Web, and USB are secured to desired level
- **Access control lists (ACLs)**: provide filtering based on the IP field, source/destination IP address/subnet, and source/destination TCP/UDP port number on a per-VLAN or per-port basis
- **Multiple user authentication methods**:
 - **Multiple IEEE 802.1X users per port**: provides authentication of multiple IEEE 802.1X users per port; prevents user "piggybacking" on another user's IEEE 802.1X authentication
 - **Web-based authentication**: authenticates from Web browser for clients that do not support IEEE 802.1X supplicant; customized remediation can be processed on an external Web server
 - **MAC-based authentication**: client is authenticated with the RADIUS server based on client's MAC address
 - **Concurrent IEEE 802.1X, Web, and MAC authentication schemes per port**: switch port will accept up to 32 sessions of IEEE 802.1X, Web, and MAC authentications
- **Switch CPU protection**: provides automatic protection against malicious network traffic trying to shut down the switch
- **Identity-driven ACL**: enables implementation of a highly granular and flexible access security policy specific to each authenticated network user
- **Secure Sockets Layer (SSL)**: encrypts all HTTP traffic, allowing secure access to the browser-based management GUI in the switch
- **Security banner**: displays a customized security policy when users log in to the switch

Multicast support



Overview

- **IP multicast routing** (requires Premium License): includes PIM Sparse and Dense modes to route IP multicast traffic
- **IP multicast snooping** (data-driven IGMP): automatically prevents flooding of IP multicast traffic

Quality of Service (QoS)

- **Layer 4 prioritization**: enables prioritization based on TCP/UDP port numbers
- **Class of Service (CoS)**: sets the IEEE 802.1p priority tag based on IP address, IP Type of Service (ToS), L3 protocol, TCP/UDP port number, source port, and DiffServ
- **Bandwidth shaping**:
 - **Port-based rate limiting**: per-port ingress/egress enforced maximum bandwidth
 - **Classifier-based rate limiting**: use ACL to enforce maximum bandwidth for ingress traffic on each port
 - **Guaranteed minimum**: per-port, per-queue egress-based guaranteed minimum bandwidth
- **Advanced classifier-based QoS**: classifies traffic using multiple match criteria based on L2/3/4 information; applies QoS policies such as setting priority level and rate limit to selected traffic per port or per VLAN
- **Traffic prioritization**: allows real-time traffic classification into eight priority levels mapped to eight queues

Warranty and support*

- ProCurve Lifetime Warranty: for as long as you own the product, with next-business-day advance replacement (available in most countries)
- Electronic and telephone support: limited electronic and telephone support is available from HP; refer to the HP website at www.procurve.com/support for details on the support provided and the period during which support is available
- Software releases: refer to the HP website at www.procurve.com/support for details on the software releases provided and the period during which software releases are available

* For as long as you own the product, with next-business-day advance replacement (available in most countries). The following hardware products have a five-year hardware warranty for the disk drive and lifetime hardware warranty (for as long as you own the product) for the rest of the module: HP ProCurve ONE Services zl Module, HP ProCurve Threat Management Services zl Module, and HP ProCurve MSM765zl Mobility Controller. The following hardware products and their related series modules have a one-year hardware warranty with extensions available: HP ProCurve Routing Switch 9300m series, HP ProCurve Switch 8100fl series, HP ProCurve Network Access Controller 800, and HP ProCurve DCM Controller. The following hardware products have a one-year hardware warranty with extensions available: HP ProCurve M111 Client Bridge, HP ProCurve MSM3xx-R Access Points, HP ProCurve MSM7xx Mobility and Access Controllers, HP ProCurve RF Manager IDS/IPS Systems, HP ProCurve MSM Power Supplies, HP ProCurve 1-Port Power Injector, HP ProCurve CNMS Appliances, and HP ProCurve MSM317 Access Device. Standalone software, upgrades, or licenses may have a different warranty duration. For details, refer to the ProCurve Software License, Warranty, and Support booklet at www.procurve.com/warranty.

Technical Specifications

HP ProCurve 6600-24G Switch (J9263A)	<p>20 auto-sensing 10/100/1000 ports (IEEE 802.3 Type 10Base-T, IEEE 802.3u Type 100Base-TX, IEEE 802.3ab Type 1000Base-T); Media Type: Auto-MDIX; Duplex: 10Base-T/100Base-TX: half or full; 1000Base-T: full only</p> <p>4 dual-personality ports; each port can be used as either an RJ-45 10/100/1000 port (IEEE 802.3 Type 10Base-T; IEEE 802.3u Type 100Base-TX; IEEE 802.3ab 1000Base-T Gigabit Ethernet) or an open mini-GBIC slot (for use with mini-GBIC transceivers)</p> <p>1 RS-232C DB-9 console port</p>
Power supplies	<p>includes: 1 x J9269A</p> <p>2 open power supply slots</p>
Fan tray	<p>includes: 1 x J9271A</p> <p>1 fan tray slot</p> <p>Fan tray supports N+N fans for added redundancy.</p>
Physical characteristics	<p>Dimensions 21.5(d) x 17.42(w) x 1.7(h) in. (54.61 x 44.25 x 4.32 cm) (1U height)</p> <p>Weight 16.7 lb. (7.58 kg)</p>
Memory and processor	<p>Processor type and speed Freescale PowerPC 8540 @ 666 MHz</p> <p>Flash capacity 4 MB flash, 256 MB compact flash</p> <p>SDRAM 256 MB DDR SDRAM</p> <p>Packet buffer size 18 MB QDR SDRAM total (for all 1-GbE ports)</p>
Mounting	<p>Telco rack: Mounts in an EIA-standard 19-in. 2-post telco rack or equipment cabinet; horizontal surface mounting only. Rack kit: Rack rails are required for mounting in HP 10000 Series 4-post racks.</p>
Performance	<p>100 Mb Latency < 3.7 μs (FIFO 64-byte packets)</p> <p>1000 Mb Latency < 2.1 μs (FIFO 64-byte packets)</p> <p>Throughput up to 35.7 million pps</p> <p>Routing/Switching capacity 48 Gbps</p> <p>Switch fabric speed 48 Gbps</p> <p>Routing table size 10000 entries</p> <p>MAC address table size 64000 entries</p>
Environment	<p>Operating temperature 41°F to 104°F (5°C to 40°C)</p> <p>Operating relative humidity 15% to 80% @ 104°F (40°C), non-condensing</p> <p>Non-operating/Storage temperature -40°F to 158°F (-40°C to 70°C)</p> <p>Non-operating/Storage relative humidity 15% to 90% @ 158°F (70°C), non-condensing</p> <p>Altitude up to 10000 ft. (3 km)</p> <p>Acoustic Power 71 dB Pressure 62.3 dB ISO 7779, ISO 9296</p>
Electrical characteristics	<p>Description The switch automatically adjusts to any voltage between 100-120 and 200-240 volts and either 50 or 60 Hz</p>

Technical Specifications

	Maximum heat dissipation	425 BTU/hr (448.38 kJ/hr)
	Voltage	100-120 / 200-240 VAC
	Idle power	92.5 W
	Power consumption	124.6 W
	Frequency	50 / 60 Hz
Notes	<p>Idle power is the actual power consumption of the device with no ports connected.</p> <p>Maximum power rating is the worst-case theoretical maximum power number with fully loaded PoE, 100% traffic, all ports plugged in, and all modules populated.</p>	
Safety	CSA 22.2 No. 60950; EN 60950/IEC 60950; UL 60950	
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A	
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2
	Radiated	IEC 61000-4-3
	EFT/Burst	IEC 61000-4-4
	Surge	IEC 61000-4-5
	Conducted	IEC 61000-4-6
	Power frequency magnetic field	IEC 61000-4-8
	Voltage dips and interruptions	IEC 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	HP ProCurve Manager Plus; HP ProCurve Manager (included); command-line interface; Web browser; configuration menu	
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.	
Services	Refer to the HP Web site at: www.procurve.com/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
Standards and protocols	<p>Device management</p> <p>RFC 1591 DNS (client)</p> <p>HTML and telnet management</p> <p>General protocols</p> <p>IEEE 802.1ad Q-in-Q (Premium License)</p> <p>IEEE 802.1D MAC Bridges</p> <p>IEEE 802.1p Priority</p> <p>IEEE 802.1Q VLANs</p> <p>IEEE 802.1s Multiple Spanning Trees</p> <p>IEEE 802.1v VLAN classification by Protocol and Port</p> <p>IEEE 802.1w Rapid Reconfiguration of Spanning Tree</p> <p>IEEE 802.3ad Link Aggregation Control Protocol (LACP)</p> <p>IEEE 802.3x Flow Control</p> <p>RFC 768 UDP</p> <p>RFC 783 TFTP Protocol (revision 2)</p> <p>RFC 792 ICMP</p> <p>RFC 793 TCP</p> <p>UDLD (Uni-directional Link Detection)</p>	

RFC 826 ARP
RFC 854 TELNET
RFC 868 Time Protocol
RFC 951 BOOTP
RFC 1058 RIPv1
RFC 1350 TFTP Protocol (revision 2)
RFC 1519 CIDR
RFC 1542 BOOTP Extensions
RFC 2030 Simple Network Time Protocol (SNTP) v4
RFC 2131 DHCP
RFC 2453 RIPv2
RFC 2548 (MS-RAS-Vendor only)
RFC 3046 DHCP Relay Agent Information Option
RFC 3576 Ext to RADIUS (CoA only)
RFC 3768 VRRP
RFC 4675 RADIUS VLAN & Priority

IP multicast
RFC 3376 IGMPv3 (host joins only)
RFC 3973 Draft 2 PIM Dense Mode (Premium License)
RFC 4601 Draft 10 PIM Sparse Mode (Premium License)

IPv6
RFC 1981 IPv6 Path MTU Discovery
RFC 2460 IPv6 Specification
RFC 2710 Multicast Listener Discovery (MLD) for IPv6
RFC 2925 Remote Operations MIB (Ping only)
RFC 3019 MLDv1 MIB
RFC 3315 DHCPv6 (client only)
RFC 3513 IPv6 Addressing Architecture
RFC 3596 DNS Extension for IPv6
RFC 3810 MLDv2 (host joins only)
RFC 4022 MIB for TCP
RFC 4113 MIB for UDP
RFC 4251 SSHv6 Architecture
RFC 4252 SSHv6 Authentication
RFC 4253 SSHv6 Transport Layer
RFC 4254 SSHv6 Connection
RFC 4293 MIB for IP
RFC 4419 Key Exchange for SSH
RFC 4443 ICMPv6
RFC 4541 IGMP & MLD Snooping Switch
RFC 4861 IPv6 Neighbor Discovery
RFC 4862 IPv6 Stateless Address Auto-configuration

MIBs
RFC 1213 MIB II
RFC 1493 Bridge MIB
RFC 1724 RIPv2 MIB
RFC 1850 OSPFv2 MIB
RFC 2021 RMONv2 MIB
RFC 2096 IP Forwarding Table MIB
RFC 2613 SMON MIB
RFC 2618 RADIUS Client MIB
RFC 2620 RADIUS Accounting MIB
RFC 2665 Ethernet-Like-MIB
RFC 2668 802.3 MAU MIB
RFC 2674 802.1p and IEEE 802.1Q Bridge MIB
RFC 2737 Entity MIB (Version 2)
RFC 2787 VRRP MIB
RFC 2863 The Interfaces Group MIB

Technical Specifications

RFC 2925 Ping MIB

Network management

IEEE 802.1AB Link Layer Discovery Protocol (LLDP)

RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9

(events)

RFC 3176 sFlow

ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED)

SNMPv1/v2c/v3

XRMON

OSPF

RFC 2328 OSPFv2 (Premium License)

RFC 3101 OSPF NSSA

QoS/Cos

RFC 2474 DiffServ Precedence, including 8 queues/port

RFC 2597 DiffServ Assured Forwarding (AF)

RFC 2598 DiffServ Expedited Forwarding (EF)

Security

IEEE 802.1X Port Based Network Access Control

RFC 1492 TACACS+

RFC 2865 RADIUS (client only)

RFC 2866 RADIUS Accounting Secure Sockets Layer (SSL)

SSHv2 Secure Shell

HP ProCurve 6600-24G- Ports 4XG Switch (J9264A)

20 auto-sensing 10/100/1000 ports (IEEE 802.3 Type 10Base-T, IEEE 802.3u Type 100Base-TX, IEEE 802.3ab Type 1000Base-T); Media Type: Auto-MDIX; Duplex: 10Base-T/100Base-TX: half or full; 1000Base-T: full only

4 dual-personality ports; each port can be used as either an RJ-45 10/100/1000 port (IEEE 802.3 Type 10Base-T; IEEE 802.3u Type 100Base-TX; IEEE 802.3ab 1000Base-T Gigabit Ethernet) or an open mini-GBIC slot (for use with mini-GBIC transceivers)

1 RS-232C DB-9 console port

4 SFP+ 10-GbE ports; Duplex: full only

Power supplies

includes: 1 x J9269A

2 open power supply slots

Fan tray

includes: 1 x J9271A

1 fan tray slot

Fan tray supports N+N fans for added redundancy.

Physical characteristics

Dimensions

21.5(d) x 17.42(w) x 1.7(h) in.
(54.61 x 44.25 x 4.32 cm) (1U height)

Weight

17.2 lb. (7.8 kg)

Memory and processor

Processor type and speed

Freescale PowerPC 8540 @ 666 MHz

Flash capacity

4 MB flash, 256 MB compact flash

SDRAM

256 MB DDR SDRAM

Packet buffer size

36 MB QDR SDRAM total (18 MB for 1-GbE & 10-GbE ports)

Mounting

Telco rack: Mounts in an EIA-standard 19-in. 2-post telco rack or equipment cabinet; horizontal surface mounting only. Rack kit: Rack rails are required for mounting in HP 10000 Series 4-post racks.

Performance

100 Mb Latency < 3.7 μ s (FIFO 64-byte packets)

1000 Mb Latency < 2.1 μ s (FIFO 64-byte packets)

Technical Specifications

	Throughput	up to 75.7 million pps
	Routing/Switching capacity	101.8 Gbps
	Switch fabric speed	105.6 Gbps
	Routing table size	10000 entries
	MAC address table size	64000 entries
Environment	Operating temperature	41°F to 104°F (5°C to 40°C)
	Operating relative humidity	15% to 80% @ 104°F (40°C), non-condensing
	Non-operating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Non-operating/Storage relative humidity	15% to 90% @ 149°F (65°C), non-condensing
	Altitude	up to 10000 ft. (3 km)
	Acoustic	Power 68 dB
		Pressure 59.5 dB ISO 7779, ISO 9296
Electrical characteristics	Description	The switch automatically adjusts to any voltage between 100-120 and 200-240 volts and either 50 or 60 Hz
	Maximum heat dissipation	587 BTU/hr (619.29 kJ/hr), (max. non-PoE); 940 BTU/hr (991 kJ/hr) (max. using PoE)
	Voltage	100-120 / 200-240 VAC
	Idle power	127.4 W
	Power consumption	172.1 W
	Frequency	50 / 60 Hz
Notes		Idle power is the actual power consumption of the device with no ports connected. Maximum power rating is the worst-case theoretical maximum power number with fully loaded PoE, 100% traffic, all ports plugged in, and all modules populated.
Safety Emissions Immunity		CSA 22.2 No. 60950; EN 60950/IEC 60950; UL 60950 FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2
	Radiated	IEC 61000-4-3
	EFT/Burst	IEC 61000-4-4
	Surge	IEC 61000-4-5
	Conducted	IEC 61000-4-6
	Power frequency magnetic field	IEC 61000-4-8
	Voltage dips and interruptions	IEC 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management		HP ProCurve Manager Plus; HP ProCurve Manager (included); command-line interface; Web browser; configuration menu

Technical Specifications

Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.
Services	Refer to the HP Web site at: www.procurve.com/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.
Standards and protocols	Device management RFC 1591 DNS (client) HTML and telnet management General protocols IEEE 802.1ad Q-in-Q (Premium License) IEEE 802.1D MAC Bridges IEEE 802.1p Priority IEEE 802.1Q VLANs IEEE 802.1s Multiple Spanning Trees IEEE 802.1v VLAN classification by Protocol and Port IEEE 802.1w Rapid Reconfiguration of Spanning Tree IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.3x Flow Control RFC 768 UDP RFC 783 TFTP Protocol (revision 2) RFC 792 ICMP RFC 793 TCP UDLD (Uni-directional Link Detection) RFC 826 ARP RFC 854 TELNET RFC 868 Time Protocol RFC 951 BOOTP RFC 1058 RIPv1 RFC 1350 TFTP Protocol (revision 2) RFC 1519 CIDR RFC 1542 BOOTP Extensions RFC 2030 Simple Network Time Protocol (SNTP) v4 RFC 2131 DHCP RFC 2453 RIPv2 RFC 2548 (MS-RAS-Vendor only) RFC 3046 DHCP Relay Agent Information Option RFC 3576 Ext to RADIUS (CoA only) RFC 3768 VRRP RFC 4675 RADIUS VLAN & Priority IP multicast RFC 3376 IGMPv3 (host joins only) RFC 3973 Draft 2 PIM Dense Mode (Premium License) RFC 4601 Draft 10 PIM Sparse Mode (Premium License) IPv6 RFC 1981 IPv6 Path MTU Discovery RFC 2460 IPv6 Specification RFC 2710 Multicast Listener Discovery (MLD) for IPv6 RFC 2925 Remote Operations MIB (Ping only) RFC 3019 MLDv1 MIB RFC 3315 DHCPv6 (client only) RFC 3513 IPv6 Addressing Architecture RFC 3596 DNS Extension for IPv6 RFC 3810 MLDv2 (host joins only) RFC 4022 MIB for TCP RFC 4113 MIB for UDP

Technical Specifications

RFC 4251 SSHv6 Architecture
RFC 4252 SSHv6 Authentication
RFC 4253 SSHv6 Transport Layer
RFC 4254 SSHv6 Connection
RFC 4293 MIB for IP
RFC 4419 Key Exchange for SSH
RFC 4443 ICMPv6
RFC 4541 IGMP & MLD Snooping Switch
RFC 4861 IPv6 Neighbor Discovery
RFC 4862 IPv6 Stateless Address Auto-configuration

MIBs

RFC 1213 MIB II
RFC 1493 Bridge MIB
RFC 1724 RIPv2 MIB
RFC 1850 OSPFv2 MIB
RFC 2021 RMONv2 MIB
RFC 2096 IP Forwarding Table MIB
RFC 2613 SMON MIB
RFC 2618 RADIUS Client MIB
RFC 2620 RADIUS Accounting MIB
RFC 2665 Ethernet-Like-MIB
RFC 2668 802.3 MAU MIB
RFC 2674 802.1p and IEEE 802.1Q Bridge MIB
RFC 2737 Entity MIB (Version 2)
RFC 2787 VRRP MIB
RFC 2863 The Interfaces Group MIB
RFC 2925 Ping MIB

Network management

IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9 (events)
RFC 3176 sFlow
ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED)
SNMPv1/v2c/v3
XRMON

OSPF

RFC 2328 OSPFv2 (Premium License)
RFC 3101 OSPF NSSA

QoS/Cos

RFC 2474 DiffServ Precedence, including 8 queues/port
RFC 2597 DiffServ Assured Forwarding (AF)
RFC 2598 DiffServ Expedited Forwarding (EF)

Security

IEEE 802.1X Port Based Network Access Control
RFC 1492 TACACS+
RFC 2865 RADIUS (client only)
RFC 2866 RADIUS Accounting Secure Sockets Layer (SSL)
SSHv2 Secure Shell

HP ProCurve 6600-24XG Switch
(J9265A)

Ports

24 SFP+ 10-GbE ports (IEEE 802.3 Type 10Base-T, IEEE 802.3u Type 100Base-TX, IEEE 802.3ab Type 1000Base-T); Media Type: Auto-MDIX; Duplex: full only

1 RJ-45 serial console port

Power supplies

includes: 1 x J9269A
2 open power supply slots



Technical Specifications

Fan tray	includes: 1 x J9271A 1 fan tray slot Fan tray supports N+N fans for added redundancy.	
Physical characteristics	Dimensions	25.25(d) x 17.42(w) x 1.7(h) in. (64.14 x 44.25 x 4.32 cm) (1U height)
	Weight	19.7 lb. (8.94 kg)
Memory and processor	Processor type and speed	Freescale PowerPC 8540 @ 666 MHz
	Flash capacity	4 MB flash, 1 GB compact flash
	SDRAM	256 MB DDR SDRAM
	Packet buffer size	108 MB QDR SDRAM total (for all 10-GbE ports)
Mounting	Telco rack: Mounts in an EIA-standard 19-in. 2-post telco rack or equipment cabinet; horizontal surface mounting only. Rack kit: Rack rails are required for mounting in HP 10000 Series 4-post racks.	
Performance	100 Mb Latency	< 3.7 μ s (FIFO 64-byte packets)
	1000 Mb Latency	< 2.1 μ s (FIFO 64-byte packets)
	Throughput	up to 240.2 million pps
	Routing/Switching capacity	322.8 Gbps
	Switch fabric speed	345.6 Gbps
	Routing table size	10000 entries
	MAC address table size	64000 entries
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	15% to 80% @ 104°F (40°C), non-condensing
	Non-operating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Non-operating/Storage relative humidity	15% to 90% @ 149°F (65°C), non-condensing
	Altitude	up to 10000 ft. (3 km)
	Acoustic	Power 72 dB Pressure 61.8 dB ISO 7779, ISO 9296
Electrical characteristics	Description	The switch automatically adjusts to any voltage between 100-120 and 200-240 volts and either 50 or 60 Hz
	Maximum heat dissipation	1268 BTU/hr (1337.74 kJ/hr)
	Voltage	100-120 / 200-240 VAC
	Idle power	309.8 W
	Power consumption	371.6 W
	Frequency	50 / 60 Hz
Notes	<p>Idle power is the actual power consumption of the device with no ports connected.</p> <p>Maximum power rating is the worst-case theoretical maximum power number with fully loaded PoE, 100% traffic, all ports plugged in, and all modules populated.</p>	
Safety	CSA 22.2 No. 60950; EN 60950/IEC 60950; UL 60950	

Technical Specifications

Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
Immunity	<p>EN EN 55024, CISPR 24</p> <p>ESD IEC 61000-4-2</p> <p>Radiated IEC 61000-4-3</p> <p>EFT/Burst IEC 61000-4-4</p> <p>Surge IEC 61000-4-5</p> <p>Conducted IEC 61000-4-6</p> <p>Power frequency magnetic field IEC 61000-4-8</p> <p>Voltage dips and interruptions IEC 61000-4-11</p> <p>Harmonics EN 61000-3-2, IEC 61000-3-2</p> <p>Flicker EN 61000-3-3, IEC 61000-3-3</p>
Management	HP ProCurve Manager Plus; HP ProCurve Manager (included); command-line interface; Web browser; configuration menu
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.
Services	Refer to the HP Web site at: www.procurve.com/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.
Standards and protocols	<p>Device management</p> <p>RFC 1591 DNS (client)</p> <p>HTML and telnet management</p> <p>General protocols</p> <p>IEEE 802.1ad Q-in-Q (Premium License)</p> <p>IEEE 802.1D MAC Bridges</p> <p>IEEE 802.1p Priority</p> <p>IEEE 802.1Q VLANs</p> <p>IEEE 802.1s Multiple Spanning Trees</p> <p>IEEE 802.1v VLAN classification by Protocol and Port</p> <p>IEEE 802.1w Rapid Reconfiguration of Spanning Tree</p> <p>IEEE 802.3ad Link Aggregation Control Protocol (LACP)</p> <p>IEEE 802.3x Flow Control</p> <p>RFC 768 UDP</p> <p>RFC 783 TFTP Protocol (revision 2)</p> <p>RFC 792 ICMP</p> <p>RFC 793 TCP</p> <p>UDLD (Uni-directional Link Detection)</p> <p>RFC 826 ARP</p> <p>RFC 854 TELNET</p> <p>RFC 868 Time Protocol</p> <p>RFC 951 BOOTP</p> <p>RFC 1058 RIPv1</p> <p>RFC 1350 TFTP Protocol (revision 2)</p> <p>RFC 1519 CIDR</p> <p>RFC 1542 BOOTP Extensions</p> <p>RFC 2030 Simple Network Time Protocol (SNTP) v4</p> <p>RFC 2131 DHCP</p> <p>RFC 2453 RIPv2</p> <p>RFC 2548 (MS-RAS-Vendor only)</p> <p>RFC 3046 DHCP Relay Agent Information Option</p> <p>RFC 3576 Ext to RADIUS (CoA only)</p>

Technical Specifications

RFC 3768 VRRP
RFC 4675 RADIUS VLAN & Priority

IP multicast

RFC 3376 IGMPv3 (host joins only)
RFC 3973 Draft 2 PIM Dense Mode (Premium License)
RFC 4601 Draft 10 PIM Sparse Mode (Premium License)

IPv6

RFC 1981 IPv6 Path MTU Discovery
RFC 2460 IPv6 Specification
RFC 2710 Multicast Listener Discovery (MLD) for IPv6
RFC 2925 Remote Operations MIB (Ping only)
RFC 3019 MLDv1 MIB
RFC 3315 DHCPv6 (client only)
RFC 3513 IPv6 Addressing Architecture
RFC 3596 DNS Extension for IPv6
RFC 3810 MLDv2 (host joins only)
RFC 4022 MIB for TCP
RFC 4113 MIB for UDP
RFC 4251 SSHv6 Architecture
RFC 4252 SSHv6 Authentication
RFC 4253 SSHv6 Transport Layer
RFC 4254 SSHv6 Connection
RFC 4293 MIB for IP
RFC 4419 Key Exchange for SSH
RFC 4443 ICMPv6
RFC 4541 IGMP & MLD Snooping Switch
RFC 4861 IPv6 Neighbor Discovery
RFC 4862 IPv6 Stateless Address Auto-configuration

MIBs

RFC 1213 MIB II
RFC 1493 Bridge MIB
RFC 1724 RIPv2 MIB
RFC 1850 OSPFv2 MIB
RFC 2021 RMONv2 MIB
RFC 2096 IP Forwarding Table MIB
RFC 2613 SMON MIB
RFC 2618 RADIUS Client MIB
RFC 2620 RADIUS Accounting MIB
RFC 2665 Ethernet-Like-MIB
RFC 2668 802.3 MAU MIB
RFC 2674 802.1p and IEEE 802.1Q Bridge MIB
RFC 2737 Entity MIB (Version 2)
RFC 2787 VRRP MIB
RFC 2863 The Interfaces Group MIB
RFC 2925 Ping MIB

Network management

IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9 (events)
RFC 3176 sFlow
ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED)
SNMPv1/v2c/v3
XRMON

OSPF

RFC 2328 OSPFv2 (Premium License)
RFC 3101 OSPF NSSA

QoS/Cos

Technical Specifications

RFC 2474 DiffServ Precedence, including 8 queues/port
 RFC 2597 DiffServ Assured Forwarding (AF)
 RFC 2598 DiffServ Expedited Forwarding (EF)

Security

IEEE 802.1X Port Based Network Access Control
 RFC 1492 TACACS+
 RFC 2865 RADIUS (client only)
 RFC 2866 RADIUS Accounting Secure Sockets Layer (SSL)
 SSHv2 Secure Shell

HP ProCurve 6600-48G Ports Switch (J9451A)

44 auto-sensing 10/100/1000 ports (IEEE 802.3 Type 10Base-T, IEEE 802.3u Type 100Base-TX, IEEE 802.3ab Type 1000Base-T); Media Type: Auto-MDIX; Duplex: 10Base-T/100Base-TX: half or full; 1000Base-T: full only

4 dual-personality ports; each port can be used as either an RJ-45 10/100/1000 port (IEEE 802.3 Type 10Base-T; IEEE 802.3u Type 100Base-TX; IEEE 802.3ab 1000Base-T Gigabit Ethernet) or an open mini-GBIC slot (for use with mini-GBIC transceivers)

1 RJ-45 serial console port

Power supplies

includes: 1 x J9269A
 2 open power supply slots

Fan tray

includes: 1 x J9271A
 1 fan tray slot
 Fan tray supports N+N fans for added redundancy.

Physical characteristics

Dimensions 25.25(d) x 17.42(w) x 1.7(h) in.
 (64.14 x 44.25 x 4.32 cm) (1U height)

Weight 19 lb. (8.62 kg)

Memory and processor Processor type and speed

Freescale PowerPC 8540 @ 666 MHz

Flash capacity 4 MB flash, 1 GB compact flash

SDRAM 256 MB DDR SDRAM

Packet buffer size 36 MB QDR SDRAM total (for all 1-GbE ports)

Mounting

Mounts in an EIA-standard 19 in. 2-point telco rack or equipment cabinet (hardware included); horizontal surface mounting only

Performance

100 Mb Latency < 3.7 μ s (FIFO 64-byte packets)

1000 Mb Latency < 2.1 μ s (FIFO 64-byte packets)

Throughput up to 71.4 million pps

Routing/Switching capacity 96 Gbps

Switch fabric speed 96 Gbps

Routing table size 10000 entries

MAC address table size 64000 entries

Environment

Operating temperature 41°F to 104°F (5°C to 40°C)

Operating relative humidity 15% to 80% @ 104°F (40°C), non-condensing

Non-operating/Storage temperature -40°F to 158°F (-40°C to 70°C)

Non-operating/Storage relative humidity 15% to 90% @ 158°F (70°C), non-condensing

Altitude up to 10000 ft. (3 km)

Technical Specifications

Electrical characteristics	<p>Acoustic ISO 7779, ISO 9296</p> <p>Description The switch automatically adjusts to any voltage between 100-120 and 200-240 volts and either 50 or 60 Hz</p> <p>Voltage 100-120 / 200-240 VAC</p> <p>Frequency 50 / 60 Hz</p>
Notes	
Safety	CSA 22.2 No. 60950; EN 60950/IEC 60950; UL 60950
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
Immunity	<p>EN EN 55024, CISPR 24</p> <p>ESD IEC 61000-4-2</p> <p>Radiated IEC 61000-4-3</p> <p>EFT/Burst IEC 61000-4-4</p> <p>Surge IEC 61000-4-5</p> <p>Conducted IEC 61000-4-6</p> <p>Power frequency magnetic field IEC 61000-4-8</p> <p>Voltage dips and interruptions IEC 61000-4-11</p> <p>Harmonics EN 61000-3-2, IEC 61000-3-2</p> <p>Flicker EN 61000-3-3, IEC 61000-3-3</p>
Management	HP ProCurve Manager Plus; HP ProCurve Manager (included); command-line interface; Web browser; configuration menu
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.
Services	Refer to the HP Web site at: www.procurve.com/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.
Standards and protocols	<p>Device management</p> <p>RFC 1591 DNS (client)</p> <p>HTML and telnet management</p> <p>General protocols</p> <p>IEEE 802.1ad Q-in-Q (Premium License)</p> <p>IEEE 802.1D MAC Bridges</p> <p>IEEE 802.1p Priority</p> <p>IEEE 802.1Q VLANs</p> <p>IEEE 802.1s Multiple Spanning Trees</p> <p>IEEE 802.1v VLAN classification by Protocol and Port</p> <p>IEEE 802.1w Rapid Reconfiguration of Spanning Tree</p> <p>IEEE 802.3ad Link Aggregation Control Protocol (LACP)</p> <p>IEEE 802.3x Flow Control</p> <p>RFC 768 UDP</p> <p>RFC 783 TFTP Protocol (revision 2)</p> <p>RFC 792 ICMP</p> <p>RFC 793 TCP</p> <p>UDLD (Uni-directional Link Detection)</p> <p>RFC 826 ARP</p> <p>RFC 854 TELNET</p> <p>RFC 868 Time Protocol</p> <p>RFC 951 BOOTP</p> <p>RFC 1058 RIPv1</p>

Technical Specifications

RFC 1350 TFTP Protocol (revision 2)
RFC 1519 CIDR
RFC 1542 BOOTP Extensions
RFC 2030 Simple Network Time Protocol (SNTP) v4
RFC 2131 DHCP
RFC 2453 RIPv2
RFC 2548 (MS-RAS-Vendor only)
RFC 3046 DHCP Relay Agent Information Option
RFC 3576 Ext to RADIUS (CoA only)
RFC 3768 VRRP
RFC 4675 RADIUS VLAN & Priority

IP multicast

RFC 3376 IGMPv3 (host joins only)
RFC 3973 Draft 2 PIM Dense Mode (Premium License)
RFC 4601 Draft 10 PIM Sparse Mode (Premium License)

IPv6

RFC 1981 IPv6 Path MTU Discovery
RFC 2460 IPv6 Specification
RFC 2710 Multicast Listener Discovery (MLD) for IPv6
RFC 2925 Remote Operations MIB (Ping only)
RFC 3019 MLDv1 MIB
RFC 3315 DHCPv6 (client only)
RFC 3513 IPv6 Addressing Architecture
RFC 3596 DNS Extension for IPv6
RFC 3810 MLDv2 (host joins only)
RFC 4022 MIB for TCP
RFC 4113 MIB for UDP
RFC 4251 SSHv6 Architecture
RFC 4252 SSHv6 Authentication
RFC 4253 SSHv6 Transport Layer
RFC 4254 SSHv6 Connection
RFC 4293 MIB for IP
RFC 4419 Key Exchange for SSH
RFC 4443 ICMPv6
RFC 4541 IGMP & MLD Snooping Switch
RFC 4861 IPv6 Neighbor Discovery
RFC 4862 IPv6 Stateless Address Auto-configuration

MIBs

RFC 1213 MIB II
RFC 1493 Bridge MIB
RFC 1724 RIPv2 MIB
RFC 1850 OSPFv2 MIB
RFC 2021 RMONv2 MIB
RFC 2096 IP Forwarding Table MIB
RFC 2613 SMON MIB
RFC 2618 RADIUS Client MIB
RFC 2620 RADIUS Accounting MIB
RFC 2665 Ethernet-Like-MIB
RFC 2668 802.3 MAU MIB
RFC 2674 802.1p and IEEE 802.1Q Bridge MIB
RFC 2737 Entity MIB (Version 2)
RFC 2787 VRRP MIB
RFC 2863 The Interfaces Group MIB
RFC 2925 Ping MIB

Network management

IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9

Technical Specifications

(events)
 RFC 3176 sFlow
 ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED)
 SNMPv1/v2c/v3
 XRMON
OSPF
 RFC 2328 OSPFv2 (Premium License)
 RFC 3101 OSPF NSSA
QoS/Cos
 RFC 2474 DiffServ Precedence, including 8 queues/port
 RFC 2597 DiffServ Assured Forwarding (AF)
 RFC 2598 DiffServ Expedited Forwarding (EF)
Security
 IEEE 802.1X Port Based Network Access Control
 RFC 1492 TACACS+
 RFC 2865 RADIUS (client only)
 RFC 2866 RADIUS Accounting Secure Sockets Layer (SSL)
 SSHv2 Secure Shell

HP ProCurve 6600-48G- Ports 4XG Switch (J9452A)

	1 RJ-45 serial console port
	48 RJ-45 auto-sensing 10/100/1000 ports (IEEE 802.3 Type 10Base-T, IEEE 802.3u Type 100Base-TX, IEEE 802.3ab Type 1000Base-T); Media Type: Auto-MDIX; Duplex: 10Base-T/100Base-TX: half or full; 1000Base-T: full only
	4 SFP+ 10-GbE ports (IEEE 802.3ak Type 10Gbase-CX4); Duplex: full only
Power supplies	includes: 1 x J9269A 2 open power supply slots
Fan tray	includes: 1 x J9271A 1 fan tray slot Fan tray supports N+N fans for added redundancy.
Physical characteristics	Dimensions 25.25(d) x 17.42(w) x 1.7(h) in. (64.14 x 44.25 x 4.32 cm) (1U height) Weight 19 lb. (8.62 kg)
Memory and processor	Processor type and speed Freescale PowerPC 8540 @ 666 MHz Flash capacity 4 MB flash, 1 GB compact flash SDRAM 256 MB DDR SDRAM Packet buffer size 72 MB QDR SDRAM total (36 MB for 1-GbE & 10-GbE ports)
Mounting	Mounts in an EIA-standard 19 in. 2-point telco rack or equipment cabinet (hardware included); horizontal surface mounting only
Performance	100 Mb Latency < 3.7 μs (FIFO 64-byte packets) 1000 Mb Latency < 2.1 μs (FIFO 64-byte packets) Throughput up to 130.9 million pps Routing/Switching capacity 176 Gbps Switch fabric speed 176 Gbps Routing table size 10000 entries MAC address table size 64000 entries
Environment	Operating temperature 41°F to 104°F (5°C to 40°C)



Technical Specifications

	Operating relative humidity	15% to 80% @ 104°F (40°C), non-condensing
	Non-operating/ Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Non-operating/ Storage relative humidity	15% to 90% @ 158°F (70°C), non-condensing
	Altitude	up to 10000 ft. (3 km)
	Acoustic	ISO 7779, ISO 9296
Electrical characteristics	Description	The switch automatically adjusts to any voltage between 100-127 and 200-240 volts and either 50 or 60 Hz
	Voltage	100-120 / 200-240 VAC
	Frequency	50 / 60 Hz
Notes		
Safety		CSA 22.2 No. 60950; EN 60950/IEC 60950; UL 60950
Emissions		FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2
	Radiated	IEC 61000-4-3
	EFT/Burst	IEC 61000-4-4
	Surge	IEC 61000-4-5
	Conducted	IEC 61000-4-6
	Power frequency magnetic field	IEC 61000-4-8
	Voltage dips and interruptions	IEC 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management		HP ProCurve Manager Plus; HP ProCurve Manager (included); command-line interface; Web browser; configuration menu
Notes		When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.
Services		Refer to the HP Web site at: www.procurve.com/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.
Standards and protocols	Device management	RFC 1591 DNS (client) HTML and telnet management
	General protocols	IEEE 802.1ad Q-in-Q (Premium License) IEEE 802.1D MAC Bridges IEEE 802.1p Priority IEEE 802.1Q VLANs IEEE 802.1s Multiple Spanning Trees IEEE 802.1v VLAN classification by Protocol and Port IEEE 802.1w Rapid Reconfiguration of Spanning Tree IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.3x Flow Control RFC 768 UDP

Technical Specifications

RFC 783 TFTP Protocol (revision 2)
RFC 792 ICMP
RFC 793 TCP
UDLD (Uni-directional Link Detection)
RFC 826 ARP
RFC 854 TELNET
RFC 868 Time Protocol
RFC 951 BOOTP
RFC 1058 RIPv1
RFC 1350 TFTP Protocol (revision 2)
RFC 1519 CIDR
RFC 1542 BOOTP Extensions
RFC 2030 Simple Network Time Protocol (SNTP) v4
RFC 2131 DHCP
RFC 2453 RIPv2
RFC 2548 (MS-RAS-Vendor only)
RFC 3046 DHCP Relay Agent Information Option
RFC 3576 Ext to RADIUS (CoA only)
RFC 3768 VRRP
RFC 4675 RADIUS VLAN & Priority

IP multicast

RFC 3376 IGMPv3 (host joins only)
RFC 3973 Draft 2 PIM Dense Mode (Premium License)
RFC 4601 Draft 10 PIM Sparse Mode (Premium License)

IPv6

RFC 1981 IPv6 Path MTU Discovery
RFC 2460 IPv6 Specification
RFC 2710 Multicast Listener Discovery (MLD) for IPv6
RFC 2925 Remote Operations MIB (Ping only)
RFC 3019 MLDv1 MIB
RFC 3315 DHCPv6 (client only)
RFC 3513 IPv6 Addressing Architecture
RFC 3596 DNS Extension for IPv6
RFC 3810 MLDv2 (host joins only)
RFC 4022 MIB for TCP
RFC 4113 MIB for UDP
RFC 4251 SSHv6 Architecture
RFC 4252 SSHv6 Authentication
RFC 4253 SSHv6 Transport Layer
RFC 4254 SSHv6 Connection
RFC 4293 MIB for IP
RFC 4419 Key Exchange for SSH
RFC 4443 ICMPv6
RFC 4541 IGMP & MLD Snooping Switch
RFC 4861 IPv6 Neighbor Discovery
RFC 4862 IPv6 Stateless Address Auto-configuration

MIBs

RFC 1213 MIB II
RFC 1493 Bridge MIB
RFC 1724 RIPv2 MIB
RFC 1850 OSPFv2 MIB
RFC 2021 RMONv2 MIB
RFC 2096 IP Forwarding Table MIB
RFC 2613 SMON MIB
RFC 2618 RADIUS Client MIB
RFC 2620 RADIUS Accounting MIB
RFC 2665 Ethernet-Like-MIB
RFC 2668 802.3 MAU MIB

Technical Specifications

RFC 2674 802.1p and IEEE 802.1Q Bridge MIB

RFC 2737 Entity MIB (Version 2)

RFC 2787 VRRP MIB

RFC 2863 The Interfaces Group MIB

RFC 2925 Ping MIB

Network management

IEEE 802.1AB Link Layer Discovery Protocol (LLDP)

RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9

(events)

RFC 3176 sFlow

ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED)

SNMPv1/v2c/v3

XRMON

OSPF

RFC 2328 OSPFv2 (Premium License)

RFC 3101 OSPF NSSA

QoS/Cos

RFC 2474 DiffServ Precedence, including 8 queues/port

RFC 2597 DiffServ Assured Forwarding (AF)

RFC 2598 DiffServ Expedited Forwarding (EF)

Security

IEEE 802.1X Port Based Network Access Control

RFC 1492 TACACS+

RFC 2865 RADIUS (client only)

RFC 2866 RADIUS Accounting Secure Sockets Layer (SSL)

SSHv2 Secure Shell

© 2009 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

To learn more about HP ProCurve Networking, please visit: ProCurve.com
Information is subject to change without notice